

3/2-way pneumatic cartridge solenoid valve




- Compact design with 11 mm width per station
- Orifices from 0.5 mm (9 bar) to 1.2 mm (1.5 bar)
- High durability and reliability
- Low power consumption, as well as optional ATEX Ex ib version
- Design for optimum integration

Customer specific applications are becoming more complex. Size, fluidic performance, low power consumption and cost efficiency are critical criteria. Therefore the demands on the components used are increasing. Type 6164 was developed with the goal, to simplify pneumatic control with optimum integration of a pilot valve in block and plastic moulding parts. Thus, making a more compact design possible.

This valve sets new standards with its uncompromising reliability, above average life cycle span and excellent fluidic characteristics.


Various certifications and conformities make the use of the valve in medical applications such as media multiplexers in dental technology and oxygen control in respirators possible.

Circuit function C




3/2- way valve,
direct acting,
normally closed

Circuit function D



3/2-way valve
direct acting,
normally open

Circuit function T



3/2 way valve,
universal function

Technical data		
Orifice and pressure range	DN 0.5mm (Vac - 9bar) DN 1.0mm (Vac - 5bar)	DN 0.8mm (Vac - 7.5bar) DN 1.2mm (Vac - 1.5bar)
Permissible leakage	Vac - 10 bar (Dependent on the version used) ¹⁾	
Body material	PEEK	
Seal material	FKM, NBR (on request)	
Medium	neutral gas	
Medium temperature	FKM NBR (on request)	
	-10 bis +55 °C -20 bis +55 °C	
Ambient temperature	FKM NBR (on request)	
	-10 to +55 °C ⁵⁾ -20 to +55 °C ⁵⁾	
Typical life span	100.000.000 switching cycles (accordance to endurance tests) ²⁾	
Port connection	▪ Bürkert-Cartridge-Connection	
Electrical connection	▪ Plug / Solder ▪ Flying leads on request	
Operation voltage	12 and 24 V DC (other voltages on request)	
Voltage tolerance	±10%	
Power consumption	0.7W 2.8 W/0.3W (with external electric power reduction) 0.3 W (for Exi version)	
Duty cycle	100% continuous rating	
Installation	as required	
Protection class	depending on the electrical connection when installed	
Pins	IP00	
Special plug	IP40	
Leads	IP54	
Response times	Measurement at valve outlet acc. to DIN ISO 12238:2001	
Open	<5ms (pressure rise 0-10%)	
Closed	<5ms (pressure drop 100-90%)	
Switching frequency	16Hz	
Switching noise	42 dB ³⁾	
Weight	6 g (standard version)	
Approvals and conformity for selected variants	ATEX Ex ib - II 2G Ex ib IIC T4 T5 T6 TB01 ATEX 2048 ⁴⁾ IEC Ex PTB 07.0063 ⁴⁾ FM Class I Div II ⁴⁾ UL class 2 Oxygen compatible ⁴⁾	

¹⁾ Overpressure to the atmospheric pressure


²⁾ Life span is dependent on temperature, pressure and operating conditions

³⁾ According to ISO3745, testing environment in brass manifold, free-hanging


⁴⁾ In preparation

⁵⁾ Depending on installation conditions (see manual), higher temperatures on request

Materials


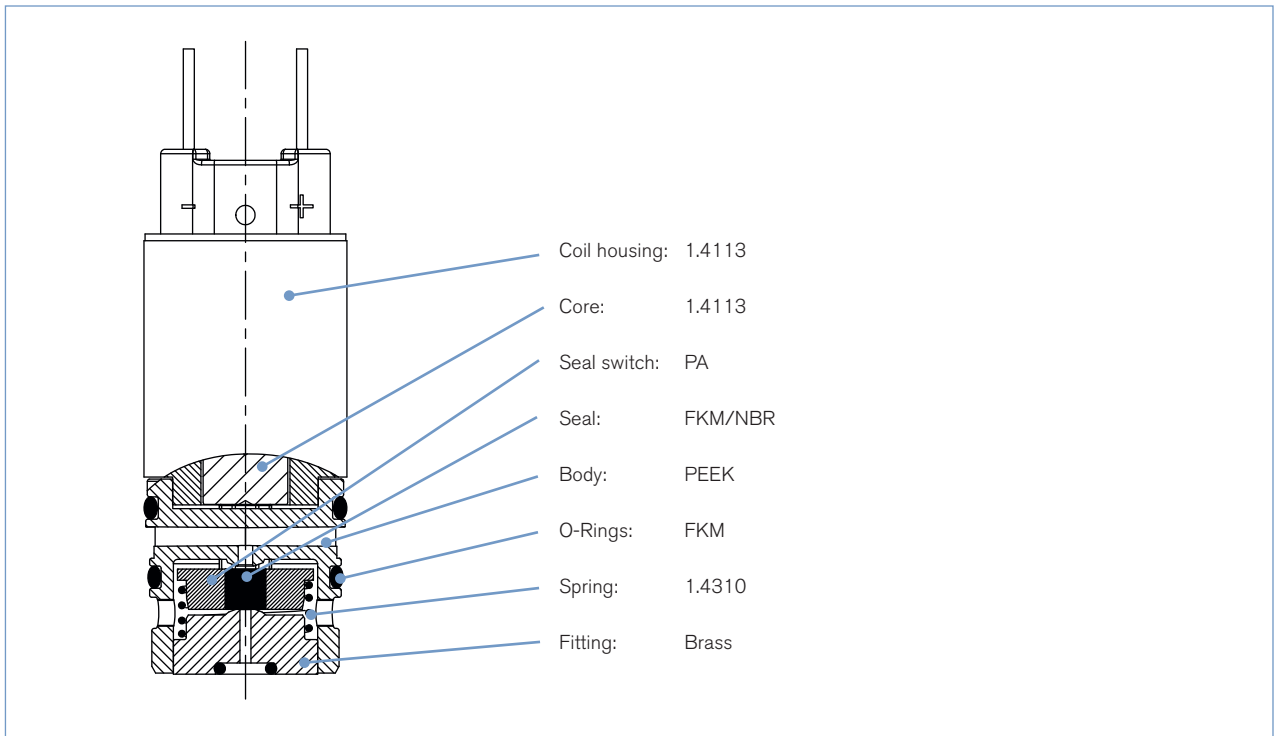


Port connection

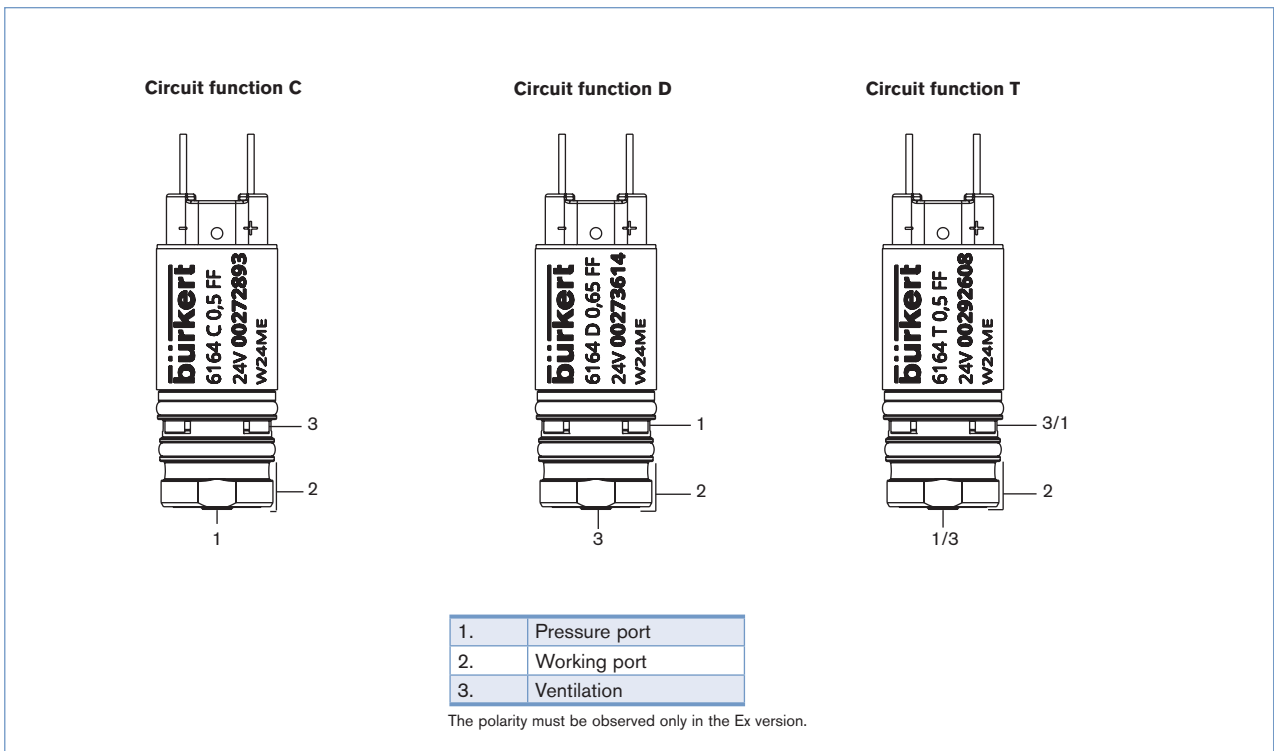


Defining of the installation area


Sunken cartridge

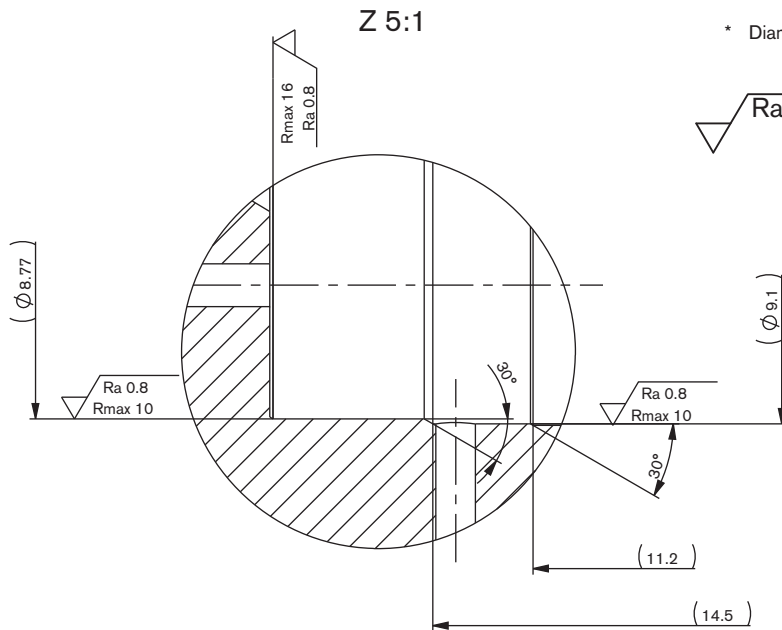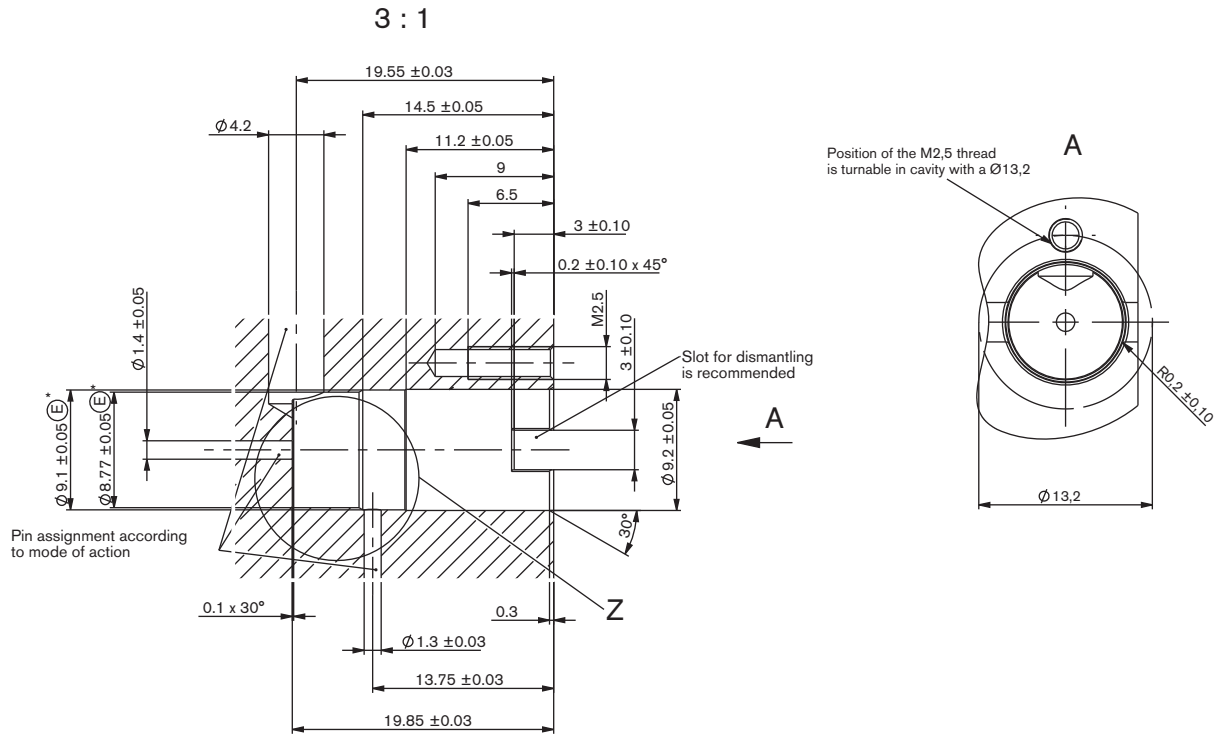

* Diameter tolerance acc. to ISO 14405 (E)



Dimensions [mm]

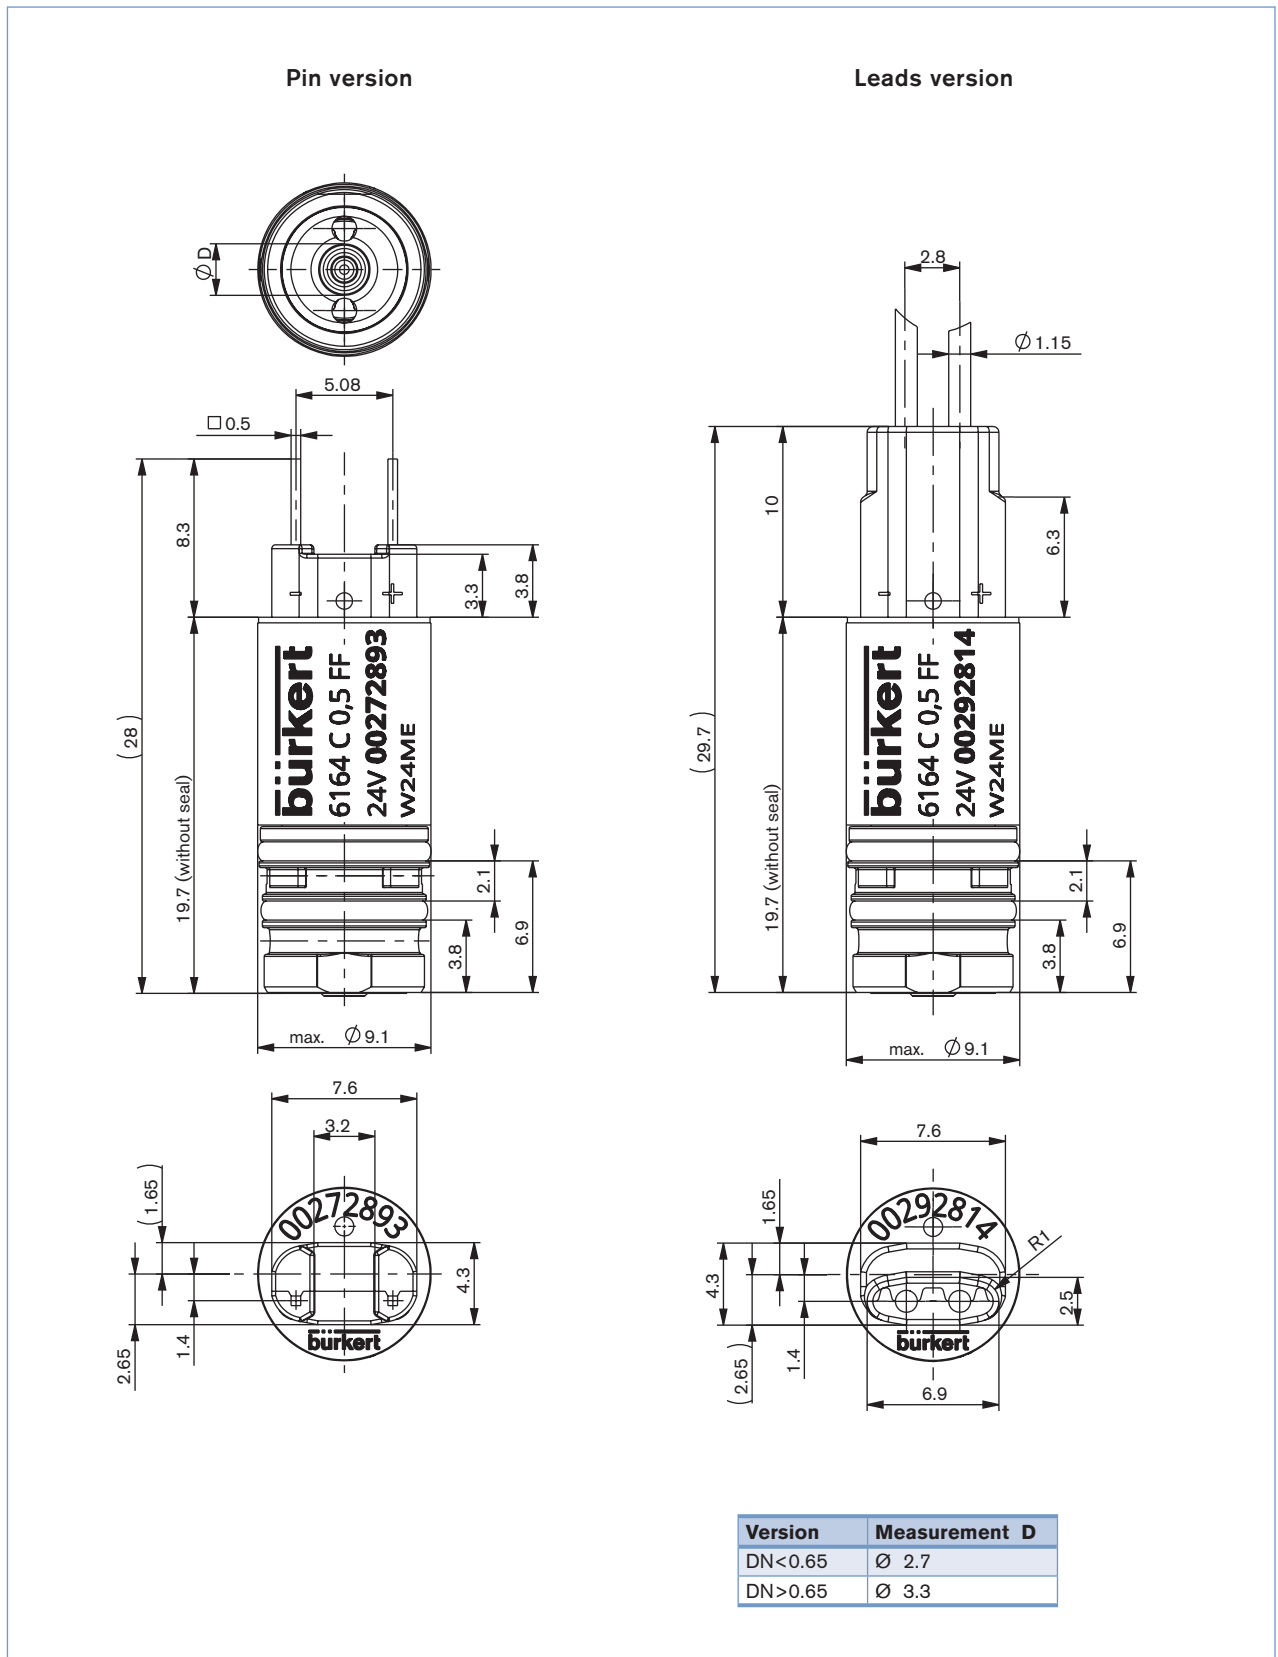

Ordering chart

Circuit function	Port connection	Orifice ventilation 1-2	Orifice ventilation 2-3	QNn value 1-2 air [l/min]	QNn value 2-3 air [l/min]	Pressure range [bar]	Voltage	Power rating [W]	Item no. with connection pin
C 	Bürkert Cartridge port connection	0.5	0.65	6	9.5	Vac-9 ¹⁾	12	0.7	273 612
		0.5	0.65	6	9.5	Vac-9 ¹⁾	24	0.7	272 893
		0.5	0.65	6	9.5	2.5-10	24	0.7	281 022
		0.8	1.1	16	20	Vac-7.5 ¹⁾	24	2.8/0.3 ²⁾	285 701
		1.0	1.1	20	20	Vac-5 ¹⁾	24	2.8/0.3 ²⁾	285 700
		1.2	1.1	25	22	Vav-1.5 ¹⁾	24	2.8/0.3 ²⁾	272 894
D 	Bürkert Cartridge port connection	0.65	0.5	6.5	6	Vac-6 ¹⁾	12	0.7	273 615
		0.65	0.5	6.5	6	Vac-6 ¹⁾	24	0.7	273 614
T 	Bürkert Cartridge port connection	0.5	0.65	6	6	Vac-4	24	0.7	292 608

¹⁾ VAC corresponds to -0.8 bar relative

²⁾ External electric power reduction necessary

i Further versions on request


⚡ Voltage
Voltages 9V, 6V, 3V on request

> Additional
Leads version on request



🔍 Approvals
Device with approvals on request

Overview of accessories

Manifold fully sunken

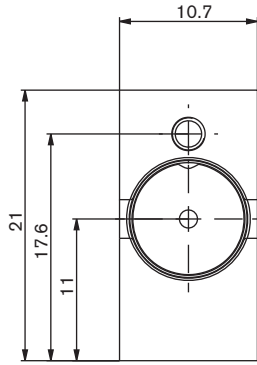


Locking

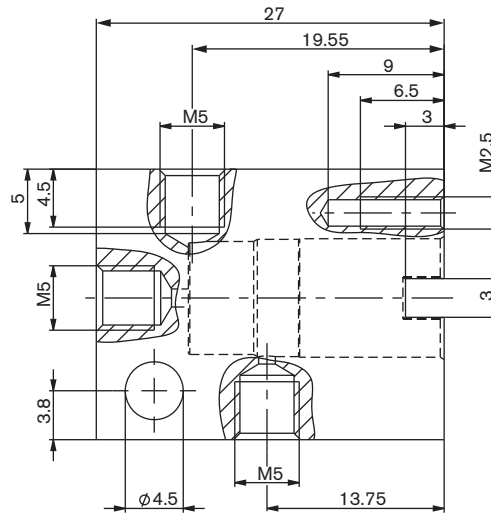


Note:
Max. tightening of the screws
(see manual)

Description	Item no.
Manifold 1 place, brass	695 913
Spare part set for Type 6164	696 033
Mounting bracket Set for Type 6164	696 032
Plug IP40 for Type 6164	695 951


Mounting bracket for semi-submerged configuration

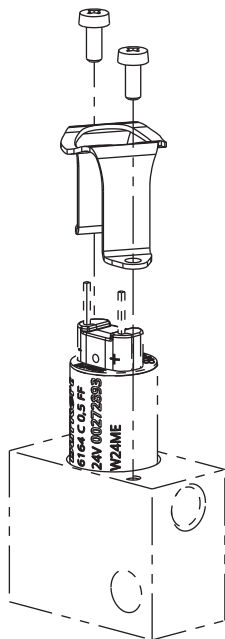

Spare part set O-ring and fixing screw

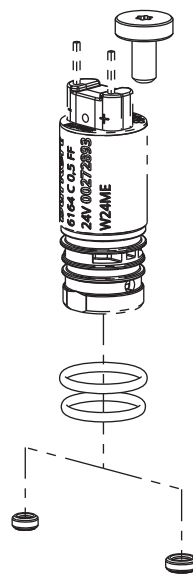


Plug with IP40 locking

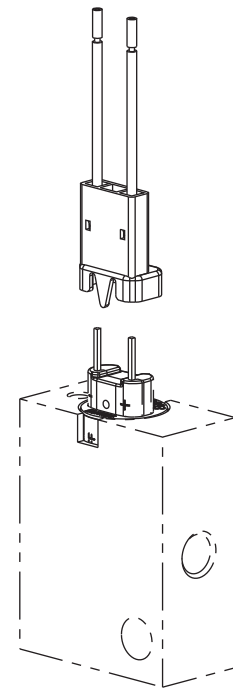


Application examples


Single block with Cartridge

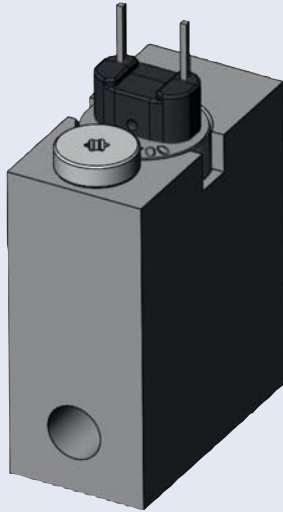

Cartridge installation position

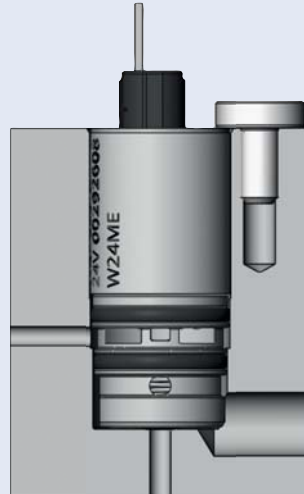

Fully sunken multi-manifold

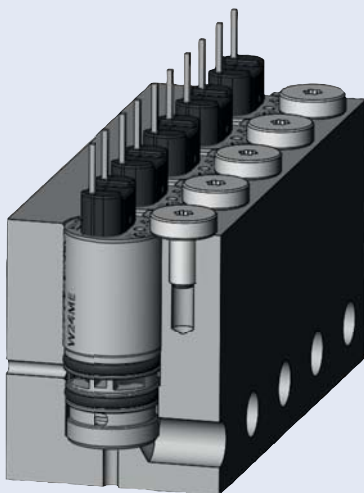

Semi-sunken multi-manifold

