




5/2-way Solenoid Valve for pneumatic systems

- Compact design
- Single and manifold mounting
- Low power consumption
- Fast response times

Type 6511 can be combined with...



Type 8640

Valve island



Type 2031


Diaphragm valve

Type 6511 consists of the pilot flipper solenoid valve Type 6144 and a pneumatic seat valve. The Flipper principle allows switching of high pressures with low power consumption and with short switching times. All valves are equipped with manual override as a standard.

Type 6511 is extendable and preferably with a cable plug at the back of the valve island, Type 8640, and with the plug connection at the front of the valve block in the pneumatic control actuators.

Technical data	
Orifice	DN 2.5 mm
Body material	PPS, PA
Seal material	NBR, FKM
Medium	Lubricated, oilfree, dry compressed air; Neutral gases (5µm filter recommended)
Medium temperature	0 to +50 °C
Ambient temperature	0 to +55 °C
Manual override	Standard
Port connection	Flange for MP02
Pneumatic module	Type MP02 with M5 or push-in connection Ø4 mm
Voltage tolerance	±10%
Operating voltages	24 V DC
Nominal power	0.8 W
Duty cycle	Continuous operation (100% ED)
Electr. connection on valve	Rectangular plug, 2 pin, with raster 5.08 mm
Protection class	IP 40
Protection class	3 acc. to VDE 0580
Mounting	with 2 self tapping screws for plastic 2 x 20
Installation	As required, preferably with actuator upright
Response times [ms]	Measurement acc. to ISO 12238
Opening	< 15ms
Closing	< 10ms

Ordering chart for valves

Circuit function	Orifice [mm]	Q _N value air [l/min] ²⁾	Pressure range [bar] ³⁾	Voltage/Frequency [V/Hz]	Manual override	Item no. plug contact at rear ³⁾ for Valve island Type 8640	Item no. Plug contact at front ⁴⁾ for valve block
H 5/2-way valve 	2.5	130	2.5-10	24 V/DC	with	187 604	184 315
					none	184 310	187 603

¹⁾ Measured at +20°C, 6 bar pressure at valve inlet and 1 bar pressure difference

²⁾ Measured as overpressure to the atmospheric pressure

³⁾ At rear: Plug connection on flange side

⁴⁾ In front: Plug connection offset at 180° to flange

Ordering chart for pneumatic module, Type MP02 (for 5/2-way valves)

Module Type MP02	Item no.
Connector module right, G1/8	135 008
Connector module right, NPT 1/8	134 743
Connector module right, push-in connection Ø 8 mm	135 009
Connector module left, G 1/8	135 005
Connector module left, NPT 1/8	134 742
Connector module left, push-in connection Ø 8 mm	135 006
Connector module without supply, left	135 007

Module Type MP02	Item no.
Basic module 2 valves, M5	135 010
Basic module 2 valves, push-in connection	135 011
Basic module 3 valves, M5	135 012
Basic module 3 valves, push-in connection	134 744
Basic module 12 valves, M5	135 013
Basic module 12 valves, push-in connection	135 014

Ordering chart for accessories

Version	Features	Item no.
Closing plug	for plug-in coupling Ø 4 mm	781 664
Blanking plug	G 1/8	631 019
Silencer	G 1/8	005 305
Covering plate, complete	for non-configured valve position on MP02	642 029
Rectangular cable plug	with 3m cable	133 486
Rectangular cable plug	with 300 mm flying leads	644 068
Rectangular cable plug	with 2 single contacts	644 067


Note for ordering complete valve block

Please order the modules for block assembly from right to left according to the example

Ordering example: Type 6511 with Type MP02

Pieces	Unit	Item no.
1	Connector module right, G 1/8	135 008
1	Basic module 2 valves, push-in connection	135 011
1	Basic module 3 valves, push-in connection	135 744
1	Connector module left, G 1/8	135 005
5	Valves	134 283

Dimensions 5/2-way Solenoid Valve [mm]

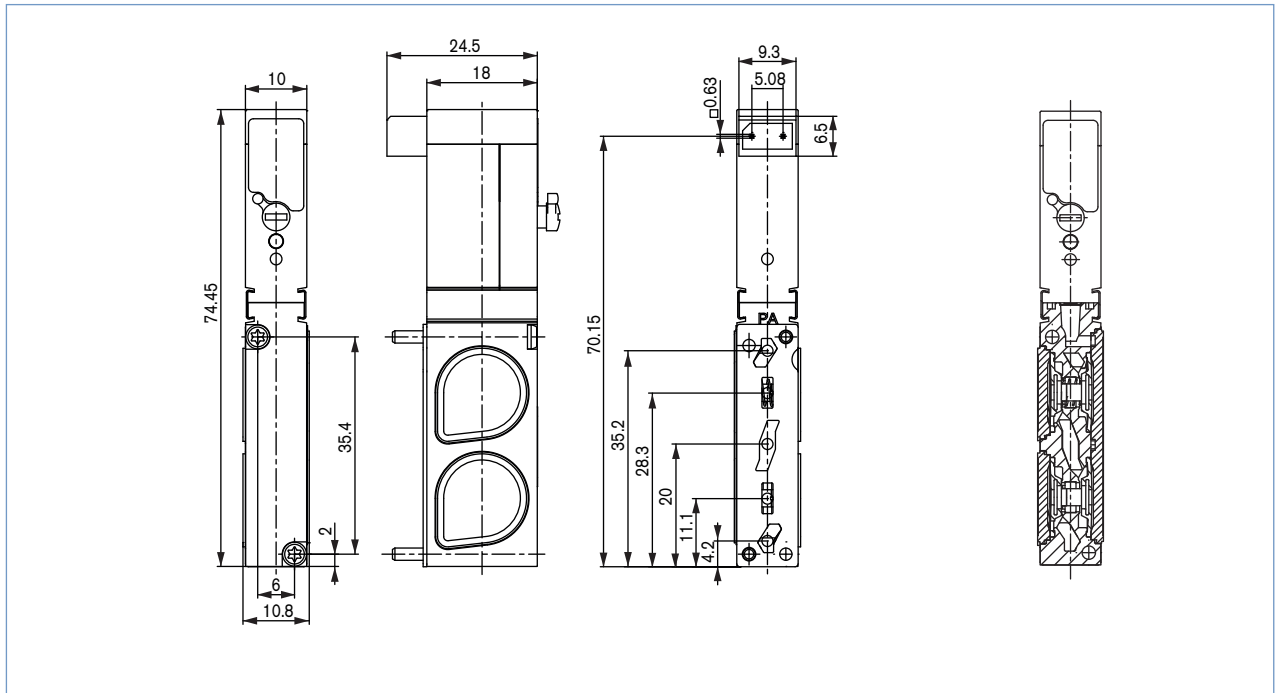

manifold mounting on wall or with DIN/EN rail 50045

