

MACP300L series

AIR UNIT (F.R.L.UNIT)




Mindman



Features

Longer case for adapting high efficient auto drain valve.

Symbol




Specification

Model	MACP300L	
Components	MAFR300L, MAL300L	
Bore No.	8A	10A
Port size	1/4	3/8
Medium	Air	
Operating pressure range (*)	0.05~1 MPa	
Proof pressure	1.5 MPa	
Regulated pressure range	0.05~0.85 MPa	
Ambient temperature	- 5~+60°C (No freezing)	
Filter element	Standard: 5μm Option: 40μm	
Lubricating oil capacity	65c.c	
Min. flow for oil drip	50 ℓ/min	60 ℓ/min
Recommended lubricating oil	Turbine oil ISO-VG32	
Attachment	Pressure gauge(PG-40), T-type bracket	
Weight	739 g	



* Standard unit contains semi-auto-drain function when operating pressure below 0.05 MPa.

* Choose auto-drain FMRF300, the pressure range is 0.15 ~ 1 MPa.

Order example


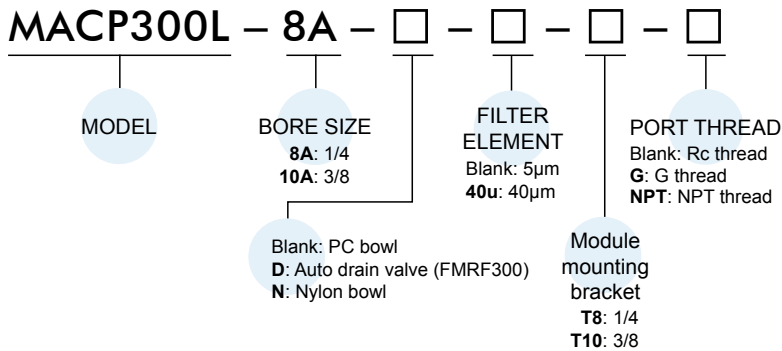


Flow feature

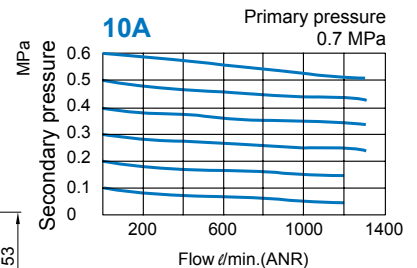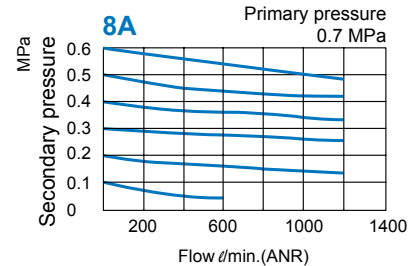

MACP300L-T*

Module mounting bracket

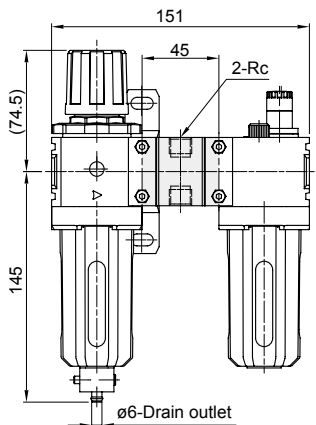

	Rc
T8	Rc1/4
T10	Rc3/8

MACP300L-D

Auto drain valve

