


# MAF403 series

## AIR UNIT (FILTER)



### Symbol



### Specification

Model	MAF403		
Bore No.	8A	10A	15A
Port size	1/4	3/8	1/2
Medium	Air		
Operating pressure range (*)	0.05~1 MPa		
Proof pressure	1.5 MPa		
Ambient temperature	- 5~+60°C (No freezing)		
Filter element	Standard: 40µm, Option: 5µm		
Drain capacity	75 cm <sup>3</sup>		
Weight	345 g		

\* Standard unit contains semi-auto drain function when operating pressure below 0.05 MPa.

\* Choose auto-drain FMRF300, the pressure range is 0.15~1 MPa.

### Order example

MAF403 - 8A - D - □ - □ - □

MODEL

PORT SIZE


8A: 1/4  
10A: 3/8  
15A: 1/2

FILTER ELEMENT  
Blank: 40µm  
5u: 5µm

Blank: Without bracket  
B: C type bracket




Blank: PC bowl + Semi-auto drain  
D: Auto drain valve (FMRF300)  
N: Nylon bowl

PORT THREAD  
Blank: Rc thread  
G: G thread  
NPT: NPT thread



### Option accessories

C type bracket

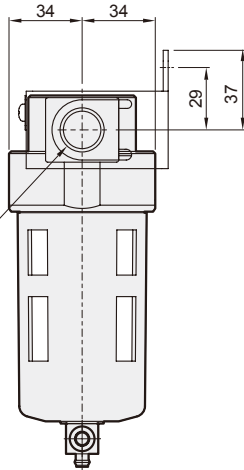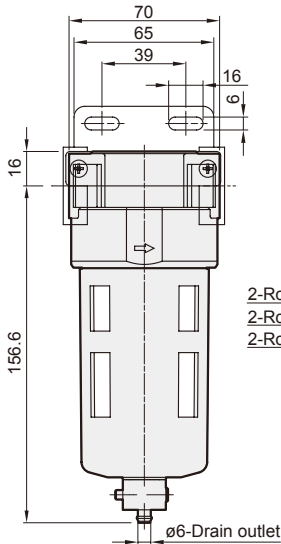

2-Rc1/4  
2-Rc3/8  
2-Rc1/2

### Flow feature

