

MAL501 series

AIR UNIT (L.UNIT)




Mindman



Specification

Model	MAL501	
Bore No.	20A	25A
Port size	3/4	1
Medium	Air	
Operating pressure range	0.05~1 MPa	
Proof pressure	1.5 MPa	
Ambient temperature	- 5~+60°C (No freezing)	
Lubricating oil capacity	200 c.c	
Min. Flow for oil drip	25 ℓ/min	33 ℓ/min
Recommended lubricating oil	Turbine oil ISO-VG32	
Weight	PC, Nylon bowl: 1260 g	
	Metal bowl: 1380 g	

Symbol



Order example

MAL501 - 20A - □ - B - □

MODEL

BORE SIZE

20A: 3/4
25A: 1




B: L type bracket

Blank: PC bowl
N: Nylon bowl
M: Metal bowl

PORT THREAD


Blank: Rc thread
G: G thread
NPT: NPT thread

* Metal bowl and nylon bowl can not be selected at the same time.

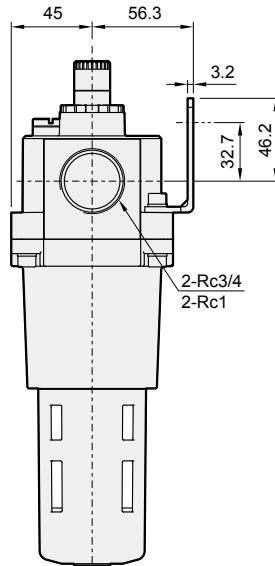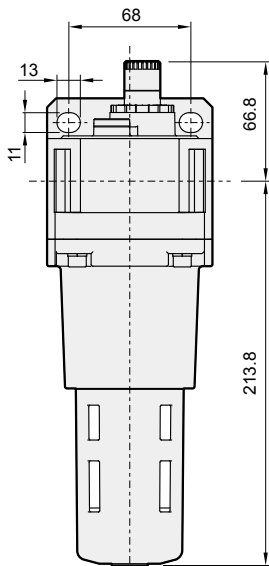

Option accessories

L type bracket



MAL501-M*

Metal bowl

