


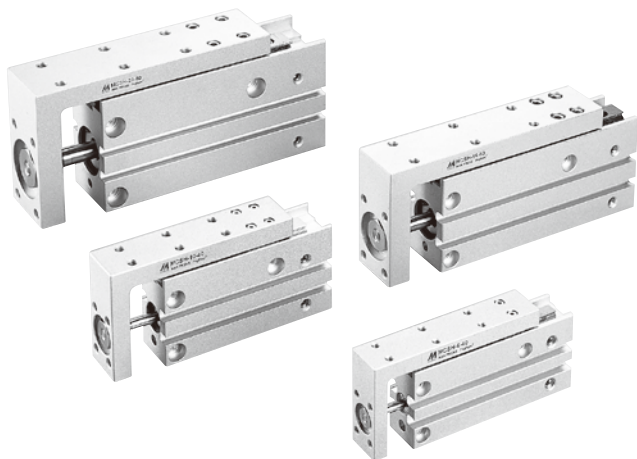

Order example

MCSH — 10 — 60

MODEL

TUBE I.D.

STROKE

Cylinder weight

Unit: g

Stroke (mm)	Tube I.D.			
	ø6	ø10	ø16	ø20
5	62	117	216	437
10	67	125	227	455
15	76	140	247	486
20	81	148	258	505
25	91	162	279	542
30	96	170	290	560
40	111	192	323	597
50	125	215	353	656
60	140	238	386	700

Features

- Compact precision cylinder.
- Cylinder can take high lateral loads and is also non rotating.
- Cylinder can be mounted in 3 or 4 positions.
- Magnetic as standard.

Specification

Model	MCSH			
Acting type	Double acting			
Tube I.D. (mm)	6	10	16	20
Guide rail width (mm)	5	7	9	12
Port size	M5×0.8			
Medium	Air			
Min. operating pressure	0.12 MPa	0.06 MPa		0.05 MPa
Max. operating pressure	0.7 MPa			
Proof pressure	1.07 MPa			
Ambient temperature	-10~+60°C (No freezing)			
Operating speed range	50~500 mm/sec			
Allowable kinetic energy J (kgf · cm)	0.125	0.25	0.5	1.0
Lubricator	Not required			
Cushion	Rubber bumper			
Stroke length tolerance	+1.0 0			
Sensor switch (*)	RCE, RCE1, RDEP			

* RCE, RCE1, RDEP specification, please refer to page 8-10, 14.

Table for standard stroke


Tube I.D.	Stroke (mm)
ø6, 10, 16, 20	5, 10, 15, 20, 25, 30, 40, 50, 60

Theoretical force


Unit: N

Tube I.D. (mm)	Piston rod (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)		
				0.3	0.5	0.7
6	3	OUT	28.3	8.49	14.2	19.8
		IN	21.2	6.36	10.6	14.8
10	4	OUT	78.5	23.6	39.3	55.0
		IN	66.0	19.8	33.0	46.2
16	6	OUT	201.0	60.3	101.0	141.0
		IN	172.0	51.6	86.0	121.0
20	8	OUT	314.0	94.2	157.0	220.0
		IN	264.0	79.2	132.0	185.0

ø6, ø10

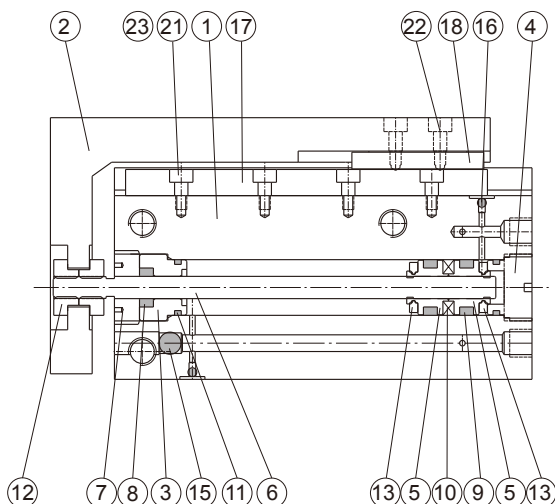

ø16, ø20

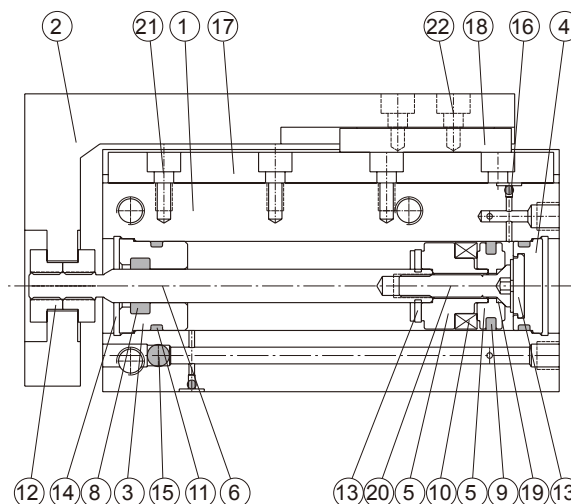

Material

No.	Tube I.D. Part name	6	10	16	20	Note	Q'y	Repair kits (inclusion)
1	Body	Aluminum alloy					1	
2	Table	Aluminum alloy					1	
3	Rod cover	*1		*2			1	
4	Head cover	Aluminum alloy					1	
5	Piston	Aluminum alloy					2	
6	Piston rod	Stainless steel					1	
7	Rod cover locker	*1		—			1	
8	Rod packing	NBR					1	●
9	Piston packing	NBR				Tube I.D.ø6,ø10 ×2, ø16,ø20 ×1	1 or 2	●
10	Magnet ring	Magnet material					1	
11	Cover ring	NBR					2	●
12	Rod front nut	Brass					2	
13	Cushion packing	NBR					2	●
14	C type snap ring for hole	—		Spring steel			2	
15	Steel ball A	Stainless steel					1	
16	Steel ball B	Stainless steel					2	
17	Linear guide	Stainless steel					1	
18	Guide seat	Stainless steel					1	
19	Piston gasket	—		NBR			1	●
20	Piston bolt	—		*1			1	
21	Hexagon socket head cap screw A	Stainless steel				Tube I.D.ø10~20 (*4)	2~5	
22	Hexagon socket head cap screw B	*3		Stainless steel		Tube I.D.ø6 ×2, ø10~20×4	2 or 4	
23	Round head Phillips screw	Stainless steel				Only for tube I.D.ø6 (*4)	2~5	
24	Plug gasket	NBR					4	●


*1. Stainless steel *2. Aluminum alloy *3. Carbon steel

*4. Quantity varies depending on the stroke length.

Order example of repair kits


Tube I.D.	Repair kits
ø6	PS-MCSH-6
ø10	PS-MCSH-10
ø16	PS-MCSH-16
ø20	PS-MCSH-20

$\phi 6$

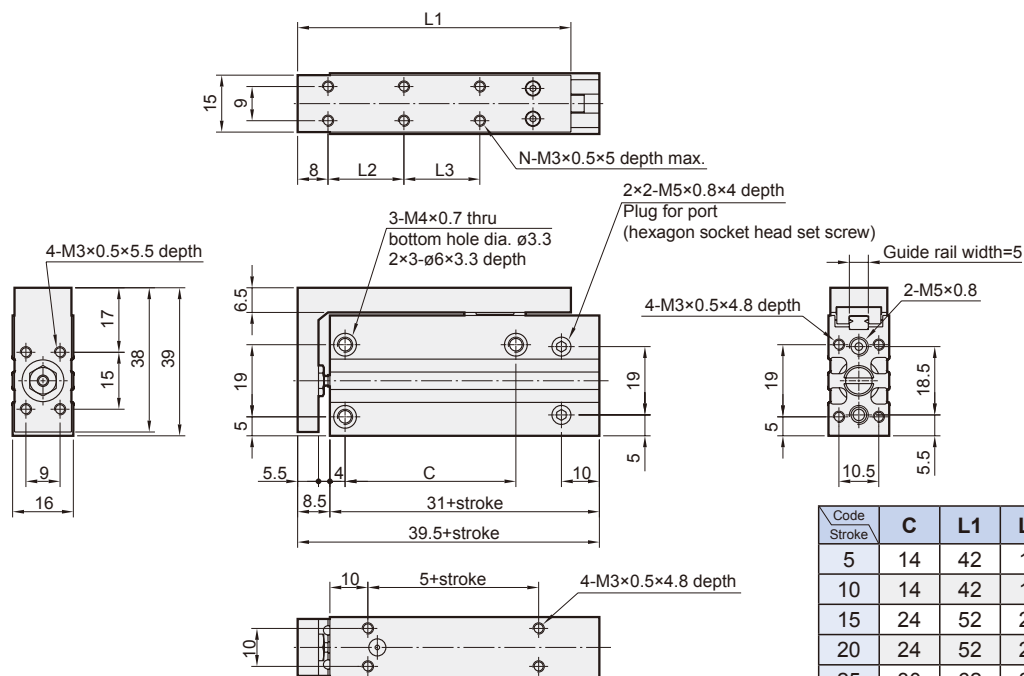


Code Stroke	C	L1	L2	L3	N
5	14	42	10	—	4
10	14	42	10	—	4
15	24	52	20	—	4
20	24	52	20	—	4
25	30	62	30	—	4
30	30	62	30	—	4
40	45	72	20	20	6
50	55	82	25	25	6
60	60	92	30	30	6

$\phi 10$

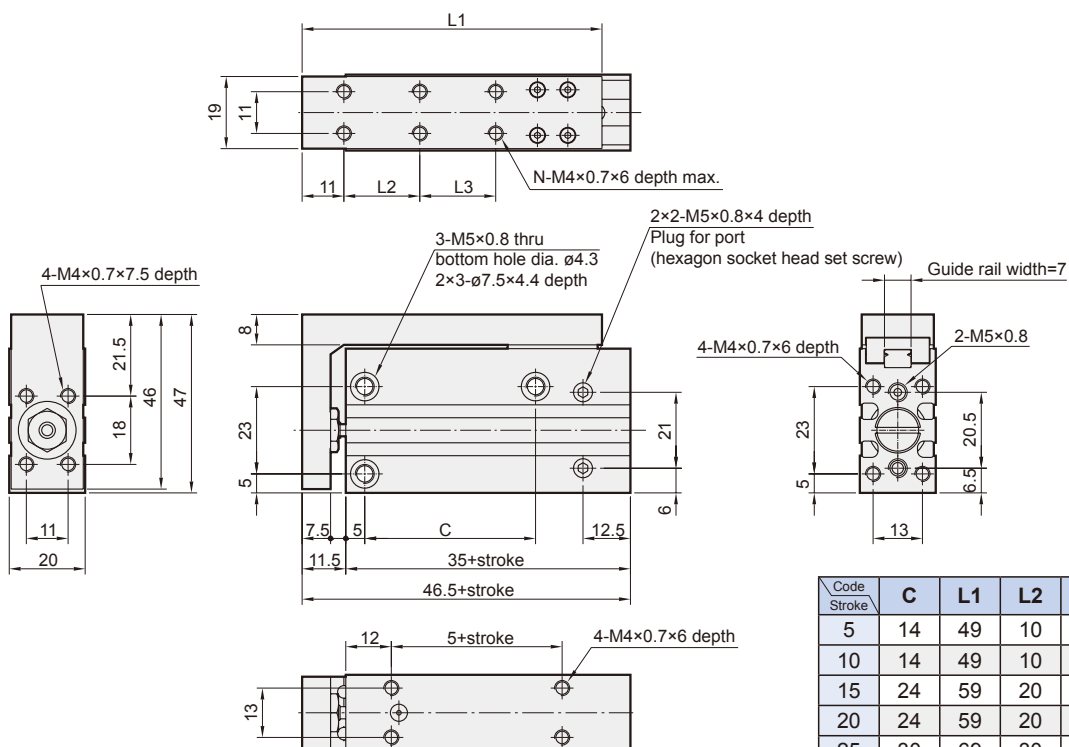


Code Stroke	C	L1	L2	L3	N
5	14	49	10	—	4
10	14	49	10	—	4
15	24	59	20	—	4
20	24	59	20	—	4
25	30	69	30	—	4
30	30	69	30	—	4
40	45	79	20	20	6
50	55	89	25	25	6
60	60	99	30	30	6

$\phi 16$

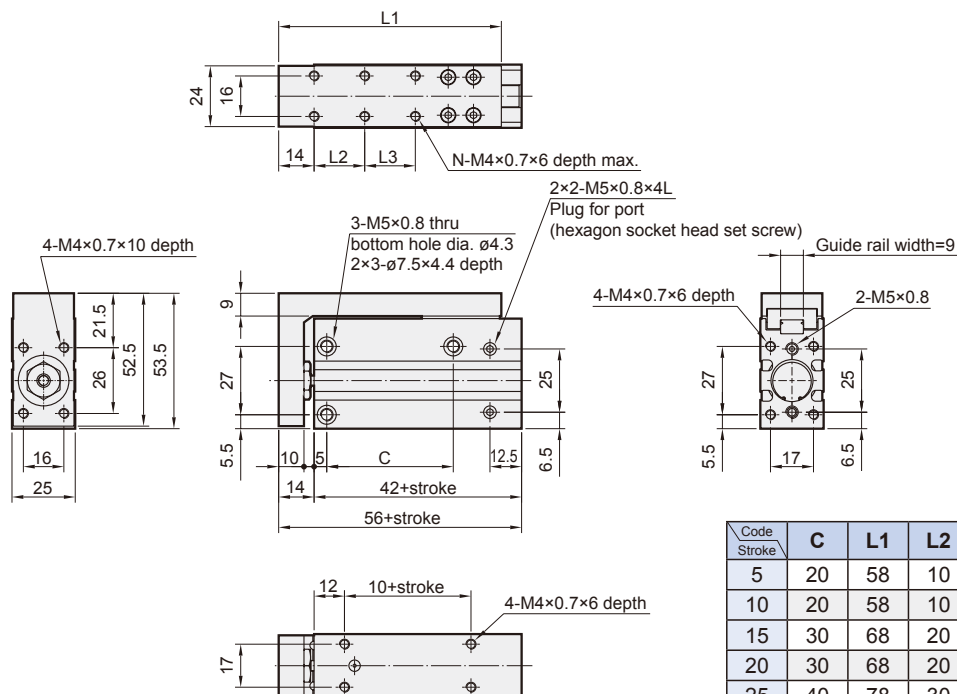

Code Stroke	C	L1	L2	L3	N
5	20	58	10	—	4
10	20	58	10	—	4
15	30	68	20	—	4
20	30	68	20	—	4
25	40	78	30	—	4
30	40	78	30	—	4
40	50	88	20	20	6
50	60	98	25	25	6
60	60	108	30	30	6

$\phi 20$

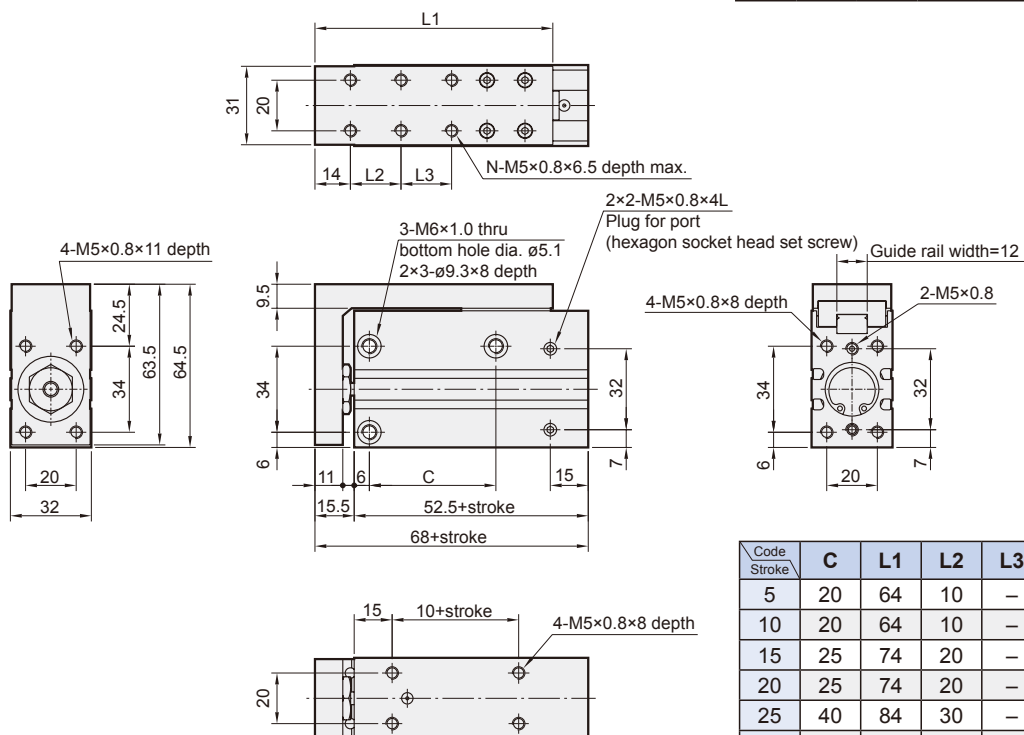

Code Stroke	C	L1	L2	L3	N
5	20	64	10	—	4
10	20	64	10	—	4
15	25	74	20	—	4
20	25	74	20	—	4
25	40	84	30	—	4
30	40	84	30	—	4
40	50	94	20	20	6
50	70	104	25	25	6
60	70	114	30	30	6