

Solenoid - spring (Self-feeding)

3/2
5/2

Ordering code

T488. **T**.0.1. **V**

TYPE

32 = 3 ways
52 = 5 ways

VOLTAGE





M9 = 24 V D.C. (rating power 2 W)

M11 = 24 V D.C. (rating power 3,8 W)

M56 = 24 V 50/60 Hz (starting power 9 VA, rating power 6 VA)

M57 = 110 V 50/60 Hz (starting power 9 VA, rating power 6 VA)

M58 = 220 V 50/60 Hz (starting power 9 VA, rating power 6 VA)

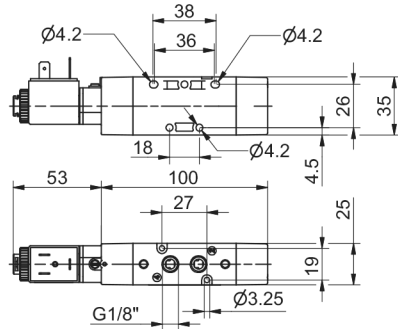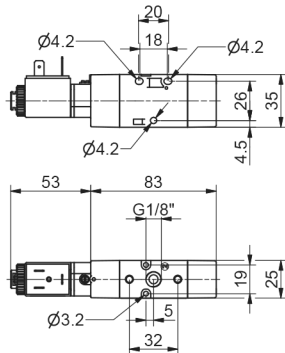

Weight gr. 160
Minimum working pressure 2,5 bar

Weight gr. 190
Minimum working pressure 2,5 bar

Operating Characteristics	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +50°C	620 Nl/min	mm 6	G 1/8"

Solenoid - spring (External feeding)

3/2
5/2

Ordering code

T488. **T**.0.1E. **V**

TYPE

32 = 3 ways
52 = 5 ways

VOLTAGE





M9 = 24 V D.C. (rating power 2 W)

M11 = 24 V D.C. (rating power 3,8 W)

M56 = 24 V 50/60 Hz (starting power 9 VA, rating power 6 VA)

M57 = 110 V 50/60 Hz (starting power 9 VA, rating power 6 VA)

M58 = 220 V 50/60 Hz (starting power 9 VA, rating power 6 VA)

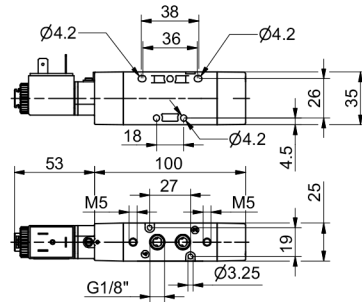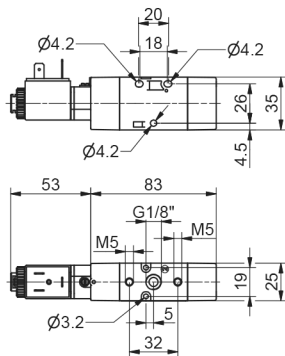


Weight gr. 160
Minimum working pressure 2,5 bar

Weight gr. 190
Minimum working pressure 2,5 bar


Operating Characteristics	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size	Pilot port size
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +50°C	620 Nl/min	mm 6	G 1/8"	M5

3/2
5/2

2

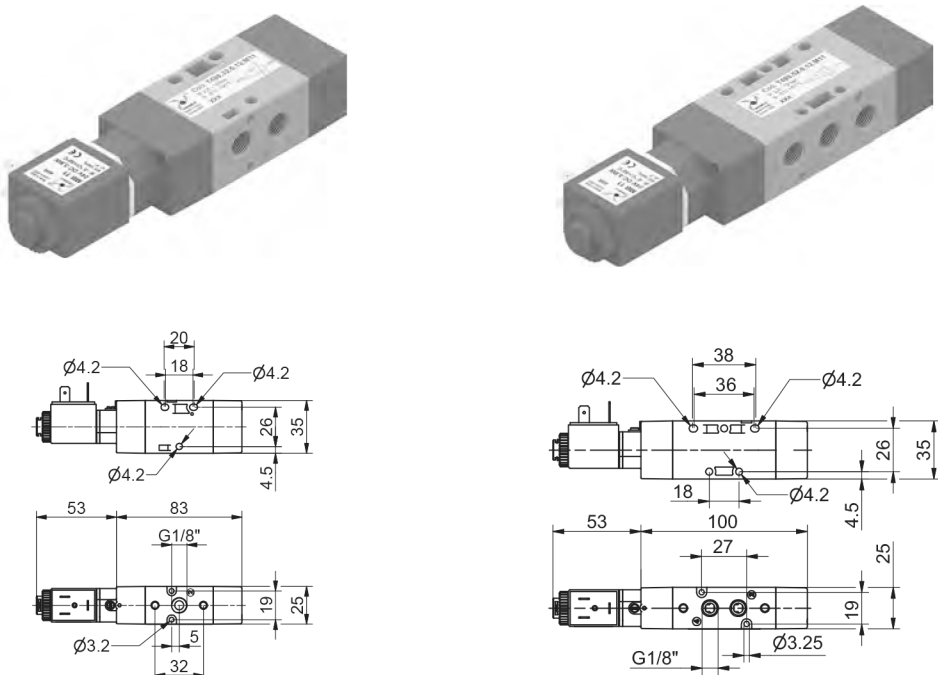Solenoid - Differential (Self-feeding)							
Ordering code							
T488.1.0.12.V							
TYPE							
32 = 3 ways							
52 = 5 ways							
VOLTAGE							
M9 = 24 V D.C. (rating power 2 W)							
M11 = 24 V D.C. (rating power 3,8 W)							
V							
M56 = 24 V 50/60 Hz (starting power 9 VA, rating power 6 VA)							
M57 = 110 V 50/60 Hz (starting power 9 VA, rating power 6 VA)							
M58 = 220 V 50/60 Hz (starting power 9 VA, rating power 6 VA)							
Weight gr. 160 Minimum working pressure 2,5 bar							
							
Weight gr. 190 Minimum working pressure 2,5 bar							
Operating Characteristics	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +50°C	620 NI/min	mm 6	G 1/8"

3/2
5/2

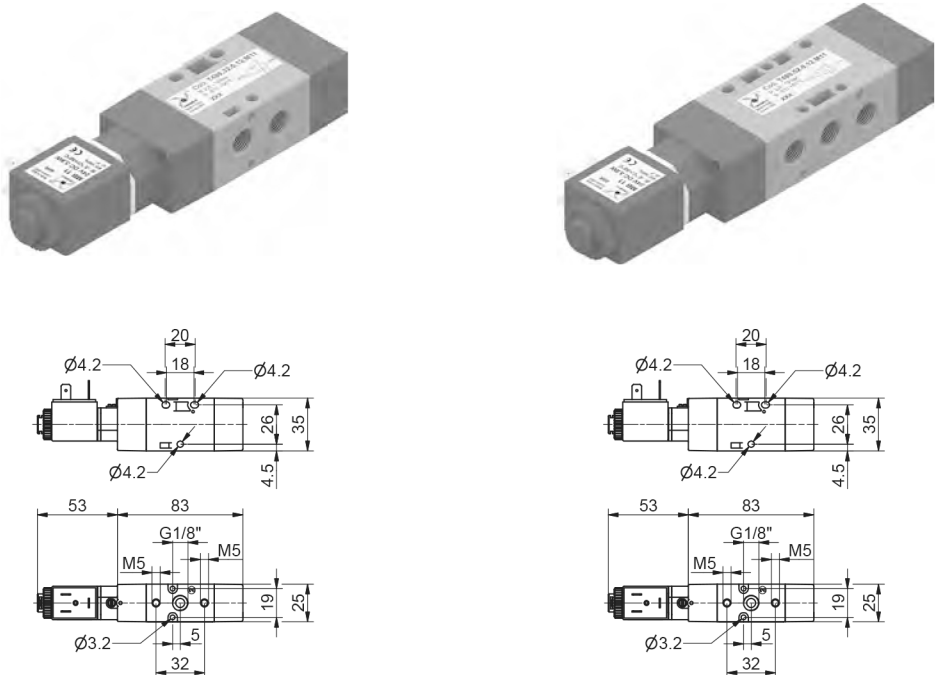Solenoid - Differential (External feeding)								3/2	5/2
Ordering code									
T488.1.0.12E.V									
TYPE									
32 = 3 ways									
52 = 5 ways									
VOLTAGE									
M9 = 24 V D.C. (rating power 2 W)									
M11 = 24 V D.C. (rating power 3,8 W)									
V									
M56 = 24 V 50/60 Hz (starting power 9 VA, rating power 6 VA)									
M57 = 110 V 50/60 Hz (starting power 9 VA, rating power 6 VA)									
M58 = 220 V 50/60 Hz (starting power 9 VA, rating power 6 VA)									
Weight gr. 160 Minimum working pressure 2,5 bar									
									
Weight gr. 190 Minimum working pressure 2,5 bar									
Operating Characteristics	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size	Pilot port size	
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +50°C	620 NI/min	mm 6	G 1/8"	M5	