




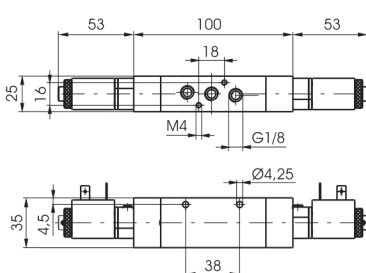


3/2	Solenoid - Spring	Ordering code	Solenoid - Spring	5/2			
  Weight gr. 220 Minimum working pressure 2,5 bar		488.T.0.1.S	  Weight gr. 260 Minimum working pressure 2,5 bar				
		T 32 = 3 ways 52 = 5 ways TENSION CODE M11 = 24 V D.C. S M56 = 24 V - 50/60 Hz M57 = 110 V - 50/60Hz M58 = 220V - 50/60Hz					
Operating Characteristics		Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size
		Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C	620 Nl/min	mm 6	G 1/8"

3/2	Solenoid - Differential	Ordering code	Solenoid - Differential	5/2			
  Weight gr. 220 Minimum working pressure 2,5 bar		488.1.0.12.S	  Weight gr. 260 Minimum working pressure 2,5 bar				
		T TYPE 32 = 3 ways 52 = 5 ways TENSION CODE M11 = 24 V D.C. S M56 = 24 V - 50/60 Hz M57 = 110 V - 50/60Hz M58 = 220V - 50/60Hz					
Operating Characteristics		Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size
		Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C	620 Nl/min	mm 6	G 1/8"

3/2	Solenoid - solenoid	Ordering code	Solenoid - solenoid	5/2			
  Weight gr. 320 Minimum working pressure 2 bar		488. T .0.0. S	  Weight gr. 360 Minimum working pressure 2 bar				
		T TYPE 32 = 3 ways 52 = 5 ways TENSION CODE M11 = 24 V D.C. S M56 = 24 V - 50/60 Hz M57 = 110 V - 50/60Hz M58 = 220V - 50/60Hz					
Operating Characteristics		Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size
		Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C	620 Nl/min	mm 6	G 1/8"

Solenoid - solenoid

5/3

Ordering code


488.53.F.0.0.S

FUNCTION




- F
31 = Closed centres
32 = Open centres
33 = Pressured centres

TENSION CODE

- S
M11 = 24 V D.C.
M56 = 24 V - 50/60 Hz
M57 = 110 V - 50/60Hz
M58 = 220V - 50/60Hz

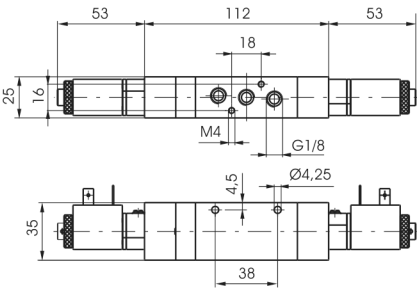


Weight gr. 400
Minimum working pressure 3 bar



Operating Characteristics	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +50°C	410 Nl/min	mm 6	G 1/8"

Manifolds

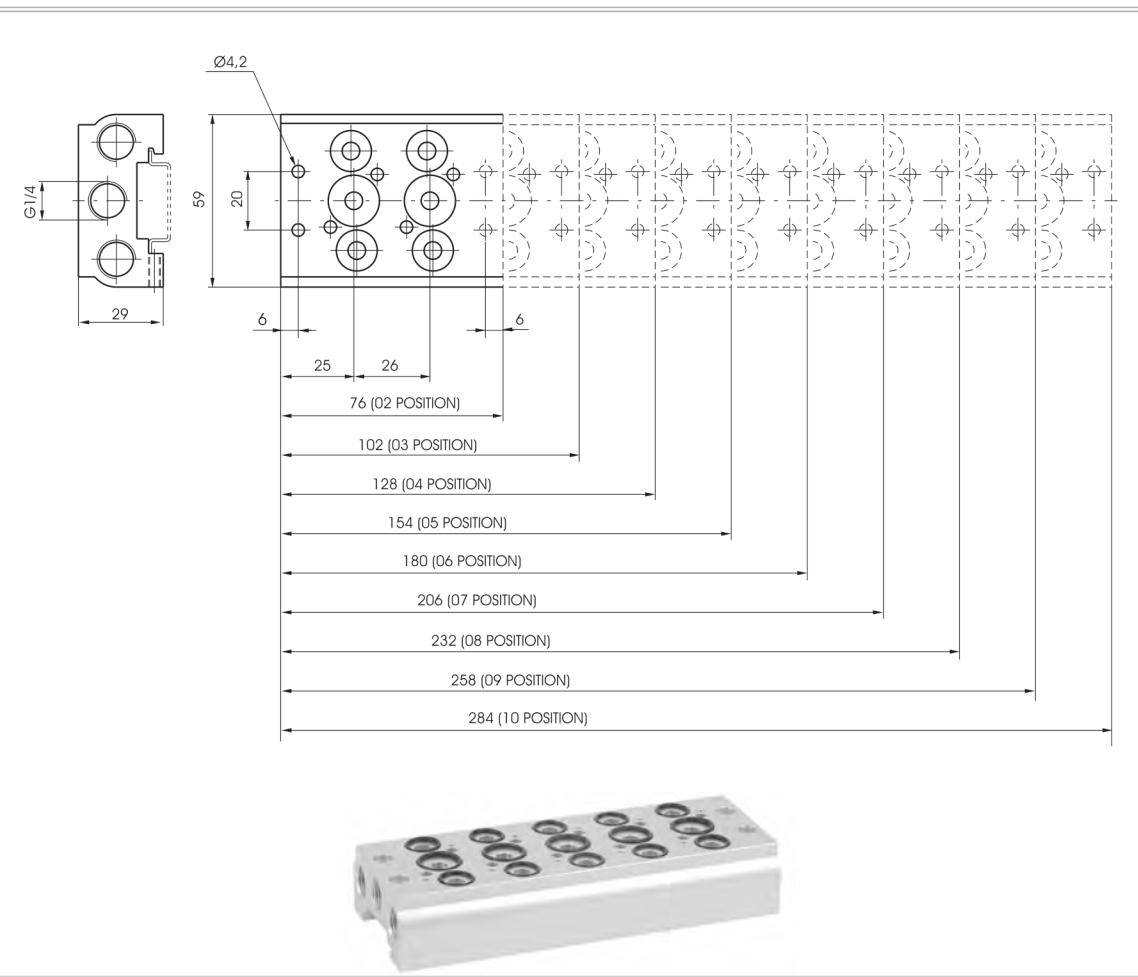

Ordering code

488.P

POSITION
02 = 2 pos. (220 gr)
03 = 3 pos. (290 gr)
04 = 4 pos. (360 gr)
05 = 5 pos. (430 gr)
06 = 6 pos. (500 gr)
07 = 7 pos. (570 gr)
08 = 8 pos. (640 gr)
09 = 9 pos. (710 gr)
10 = 10 pos. (780 gr)

P

2

Closing plate

Ordering code

488.00

