

Pneumatic - Pneumatic

5/3




Ordering code

808.53.11.11

TYPE

31 = Closed centres

32 = Open centres



Weight gr. 125

Minimum piloting pressure 3 bar

Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size	Pilot ports size
	Filtered and lubricated air	10 bar	-5 - +70	520 NI/min	mm 4	G 1/8"	M5



3/2 Solenoid - Spring

Ordering code

808.10.1.V



Solenoid - Spring

5/2



Weight gr. 130

Minimum working pressure 2 bar



Weight gr. 135

Minimum working pressure 2 bar

Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C	520 NI/min	mm 4 G 1/8"



3/2 Solenoid - Differential

Ordering code

808.10.12.V



Solenoid - Differential

5/2



Weight gr. 140

Minimum working pressure 2 bar





Weight gr. 145

Minimum working pressure 2 bar


Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C	520 NI/min	mm 4 G 1/8"

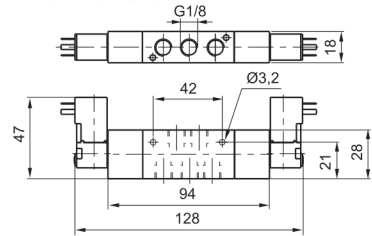3/2	Solenoid - Solenoid	Ordering code	Solenoid - Solenoid	5/2		
 		808.Ⓣ.0.0.Ⓥ TYPE Ⓣ 32 = 3 ways 52 = 5 ways VOLTAGE Ⓥ 01 = 12V D.C. 02 = 24V D.C. 05 = 24V A.C. 06 = 110V A.C. 07 = 220V A.C.	 			
Weight gr. 185 Minimum working pressure 1,5 bar				Weight gr. 190 Minimum working pressure 1,5 bar		
Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C	520 NI/min	mm 4	G 1/8"

Solenoid - Solenoid		5/3				
Ordering code						
808.53.T.0.0.V						
TYPE						
31 = Closed centres						
32 = Open centres						
VOLTAGE						
01 = 12V D.C.						
02 = 24V D.C.						
05 = 24V A.C.						
06 = 110V A.C.						
07 = 220V A.C.						
Weight gr. 190						
Minimum working pressure 3 bar						

Manifolds

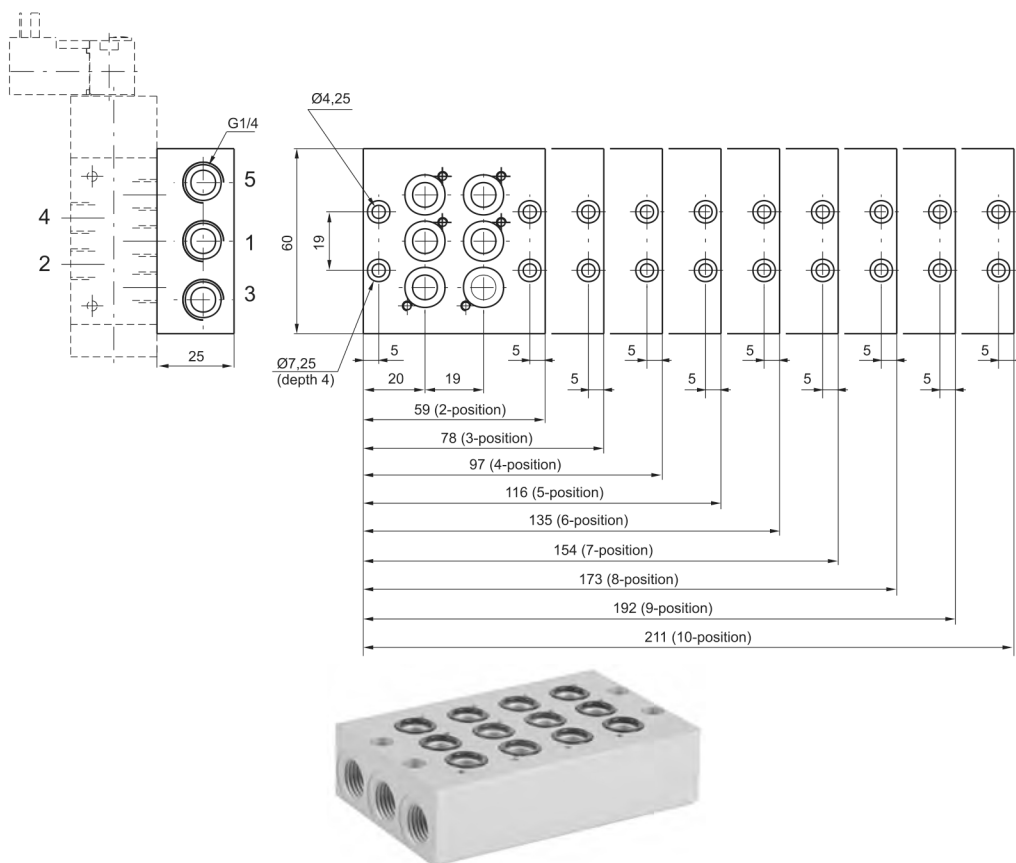


Ordering code

808. (P)

	N. POSITIONS
--	--------------

02 = 2 pos.(weight gr. 180)
03 = 3 pos.(weight gr. 245)
04 = 4 pos.(weight gr. 310)
05 = 5 pos.(weight gr. 375)
06 = 6 pos.(weight gr. 440)
07 = 7 pos.(weight gr. 500)
08 = 8 pos.(weight gr. 560)
09 = 9 pos.(weight gr. 620)
10 = 10 pos.(weight gr. 680)

Clip




Ordering code

800.00

Weight gr. 5 - (for mounting the distributors groups on guide DIN 46277/3)

Closing Plate



Ordering code

808.00

Weight gr. 65